

Installation Manual IOM16800- ModbusRTU

Packing List

IOM16800 Expansion Module (1 piece) User Manual (1 piece) Certificate of Compliance (1 piece)

1.Product parameters

This product adopts the mainstream ARM core 32-bit microprocessor and supports the Modbus RTU protocol, which can realize the fast expansion of the I/O module of the controller.

Processor: 32-bit, clock frequency: 72MHz

Memory: 64KB flash memory, 20KB random access memory

Power supply: AC/DC 12~24V

Communication: Modbus RTU (Default: 9600, 8, 1, None, Address 1)

Digital Input: Dry contact input

Digital Output: Supports dry contact output (Max. 220V/5A)

2.Model Description

	BI/DI	BO/DO	AI	AO
IOM16800	16	8	0	0

3.Register Definition Explanation

● BI/DI---Input Status(0x02)

BI/DI Register address	BI/DI Port	Description
10001	1	Digital input port
10002	2	Digital input port
10003	3	Digital input port
10004	4	Digital input port
10005	5	Digital input port
10006	6	Digital input port
10007	7	Digital input port
10008	8	Digital input port
10009	9	Digital input port
10010	10	Digital input port
10011	11	Digital input port

10012	12	Digital input port
10013	13	Digital input port
10014	14	Digital input port
10015	15	Digital input port
10016	16	Digital input port

● BO/DO—Coil Status(0x01/0x05)

BO/DO Register address	BO/DO Port	Description
00001	1	Digital output port
00002	2	Digital output port
00003	3	Digital output port
00004	4	Digital output port
00005	5	Digital output port
00006	6	Digital output port
00007	7	Digital output port
00008	8	Digital output port

● AO---Holding Register(0x03/0x06)

AO Register address	AO Port	Description
40001	---	Device Address: 1 (1~15)
40002	---	BDT: 9600 (2.4K/4.8K/9.6K/19.2K/115.2K)
40003	---	Check bit: None (0-none,1 - odd, 2 - even)

4.Wiring Instructions

Taking Channel 1 as an Example:

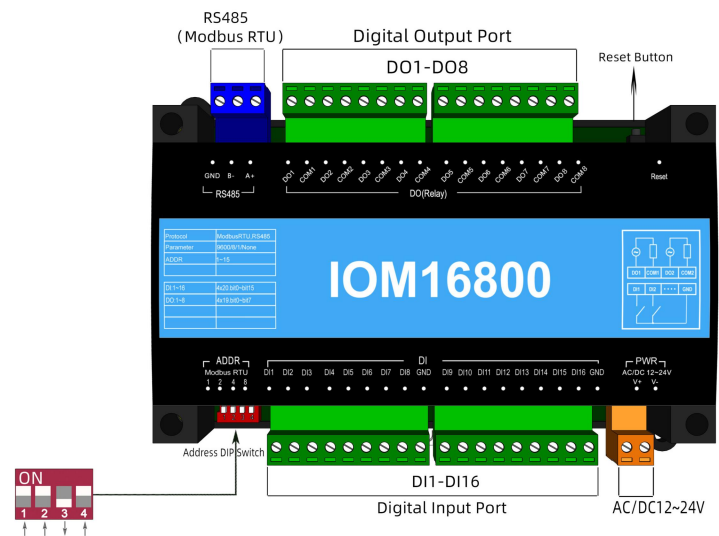


Figure 1: Digital Input Wiring Diagram



Figure 2: Digital Output Wiring Diagram

4. Wiring Instructions



5.Installation method: Rail-mounted

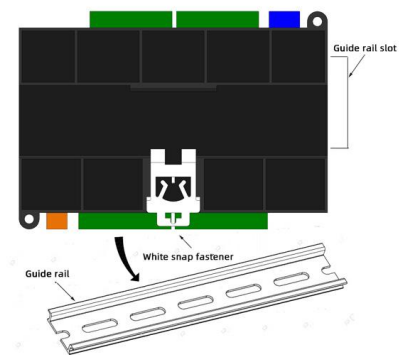


Figure 4: Pull down the white snap of the product and insert it into the rail strip. Then press the white snap upwards as shown in the figure to fix it.

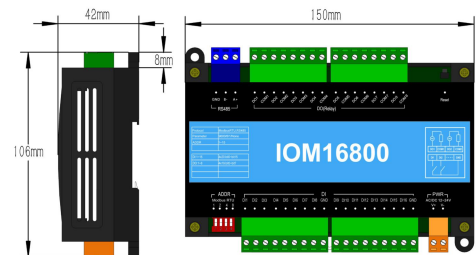


Figure 5: Product dimensions:
150mm * 106mm * 42mm (L × W × H).
Weight: 250g

6.FAQ

Q①: What is the default communication parameter of the module?

A①: The default communication parameters of the ModbusRTU module: baud-rate 9600, data-bit 8, stop-bit 1, no parity, and device ID is 1.

Q②: How to modify the communication parameter of the module?

A②: Use third-party software Modbus Poll, follow chapter “3.0 Description of Definition for Registers” , Read the data from registers 40001 and 40002, which represent device addresses (1-15) and communication baud rate of 9600. Modify the module communication parameters according to the description in the "Instructions" column. After power failure and restart, the set parameters take effect. (Station number 40001 displays the station number set by the current dip switch. If software is required to set the station number, the dip switches 1/2/3/4 must be placed in the OFF position.)

Q③: How to modify the device ID?

A③: How to modify the device ID (device address)?

Refer to the table below for the internal dial of the hardware (binary dial code).The dip switch has 4 bits, each representing a numerical value. When pushed to the OFF position, it is set to 0. When turned ON, it represents 1, 2, 4, and 8 in sequence. When turned ON, it represents the sum of numerical values, which equals the address code of the device. If the device ID is set to "11", dialing codes 1, 2, and 4 will push it to the ON position, and dialing code 3 will push it to the OFF position, which is equivalent to 1+2+8=11. Note: The maximum address code is 15.

Device ID	1	2	3	4	5	6	7	8
Dial	1	2	1+2	3	1+3	2+3	1+2+3	4
Device ID	9	10	11	12	13	14	15	
Dial	1+4	2+4	1+2+4	3+4	1+3+4	2+3+4	1+2+3+4	

Q④: How to forcibly reset the baud rate of this I/O module to its default value?

A④: Activate the module's hardware reset button (typically labeled Reset). This action immediately restores the baud rate to 9600, ensuring rapid reset of the communication link to its initial state.

The free software: BACnetScan scanning software, OPC2WEB software, X2OPC_Free software,MBus scanning tools, Lumiscan green rice smart home scanning tools.

Shanghai Sunfull Automation Co., LTD. TEL: +86-021-58776098



Address: Room 603, Building 25, Lane 8633, Zhongchun Road, Qibao town, Minhang district, Shanghai.
Technical support Tel: +86 021-20252795
Website 1: www.bacnetchina.com
SalesTel: +86 13564889340 Contacts: Linda Chen
Website 2: www.opcmaster.com